


## Catalyst KNT-721

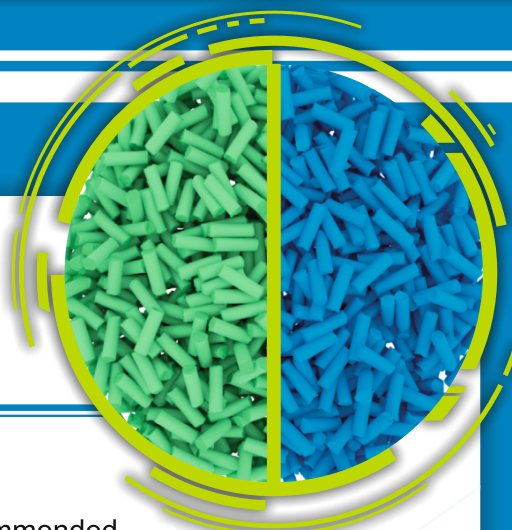

KNT-721 is used in hydrotreating of the fractions of secondary origin, residual fractions and hard waxes.

Using in the catalytic system with KNT-catalysts is recommended.

Property	Standards
1. Mass content, %:	
- Molybdenum Trioxide MoO <sub>3</sub>	12,0-22,0
- Nickel Oxide NiO (Cobalt Oxide CoO)	4,0-6,0
2. Bulk density, g/cm <sup>3</sup> :	0,55-0,80
3. Sodium Oxide, %, not more than	0,08
4. Granules size, mm	1,3-5,0
5. Grit, %, not more than	1,0
6. Ignition loss, at 500°C, %, not more than	18
7. Mechanical crushing strength, kg/mm <sup>2</sup> , not less than	1,5

### OUR CUSTOMERS

