


## Catalyst RK-720M

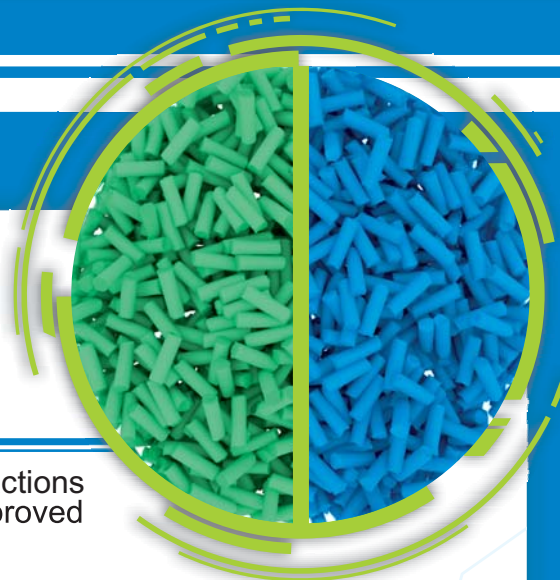

RK -720M is used in hydrotreating of middle-distillate fractions to get the components of diesel fuel and jet fuel with improved low-temperature properties.

To get low-cold test components of diesel fuel with ultralow content of Sulfur (350, 50 or 10 ppmw) is recommended to use with catalyst RK - 231M

Property	Standards	
	Type A	Type B
1. Mass content, %:		
- Molybdenum Trioxide MoO <sub>3</sub>	2,0 - 5,0	2,0 - 5,0
- Nickel Oxide NiO	-	12,0-15,0
- Silicon Dioxide SiO <sub>2</sub>	40	
2. Bulk density, g/cm <sup>3</sup>	0,6-0,8	
3. Sodium Oxide, % not more than	0,10	
4. Granules size, mm	1,6-3,0	
5. Grit, %, not more than	3,0	
6. Ignition loss, at 500°C, %, not more	5,0	
7. Crushing strength, kg/mm <sup>2</sup>	1,6	

### OUR CUSTOMERS

